



# Lider

DESIGN & MANUFACTURE  
OF ROAD TRAILERS

[www.lider.fr](http://www.lider.fr)





# Lider

LIDER, based in LAVAL (53) since 1994 and occupying a 20,000 m<sup>2</sup> building, specialises in the design and manufacture of road trailers intended for all kinds of uses, for the general public from 500 kg or for professionals up to 3500 kg.

All our trailers are approved under European directive 2007/46/EC. This advance, in terms of quality and safety, certifies our products for sale in France as well as throughout Europe.



## C O N T E N T S

Craftsmanship & Know-how	4
Practical information	6
<b>LUGGAGE &amp; TIPPER TRAILERS</b>	8
Luggage trailers	10
Wooden trailers	12
Robust trailers	14
Tippers	16
<b>FLAT-BEDS &amp; VEHICLE CARRIERS</b>	18
Robust flat-beds	20
Flat-beds with wheels underneath	22
Motorcycle carriers	24
Car carriers	26
Low-bed trailers	28
<b>VANS</b>	30
VANS	32
<b>ACCESSORIES</b>	34

*We reserve the right to make technical modifications to all our products with a view to constantly improving quality or following changes in the regulations.  
On the other hand, we would like to point out that the photos appearing in this catalogue are not contractual.*



## AT YOUR SIDE SINCE 1994





## DESIGN & INNOVATION

With a Design Office entirely dedicated to creation and innovation, our product range is constantly evolving. All our trailers are approved according to European directive 2007/46/EC.




## PRODUCTION & LOGISTICS

Our production site based in Laval (53) makes and despatches more than 45 000 trailers each year.



## QUALITY & AFTER- SALES SERVICE

Using supplier and production monitoring, our service controls the quality of trailers and provides after-sales support with a wide range of spare parts.

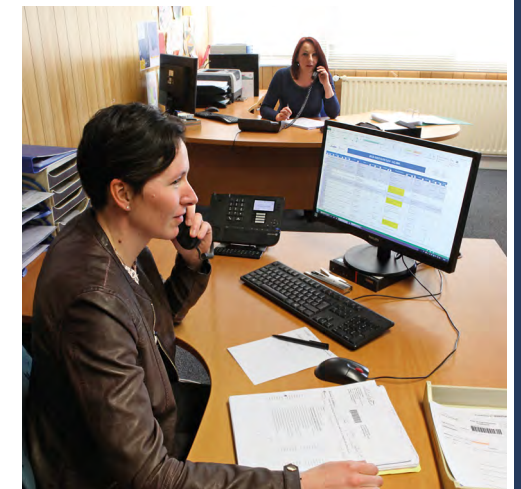

## SALES & ADVICE



With a sales team and a network of dealers located throughout France, we provide you with a local service and advice.







## USEFUL INFORMATION

Which licence for towing?  
What's the coupling height?  
What about a grey card?  
Braked trailer?  
Speed limits?  
Checking the trailer?

Answer these questions before setting off!



### WHICH LICENCE TO TOW?

A BE licence is required if the GAW of the trailer is greater than 750 kg and the sum of the GAW of the trailer and the car is greater than 3500 kg.

LICENCE  
**B**

GAW  $\leq$  3500 kg   GAW  $\leq$  750 kg  
or GAW  $\leq$  3500 kg   GAW  $>$  750 kg  
and GAW + GAW  $\leq$  3500 kg

LICENCE  
**B<sup>CODE 96</sup>**

GAW  $\leq$  3500 kg   GAW  $>$  750 kg  
and GAW + GAW  $\leq$  4250 kg

LICENCE  
**BE**

GAW  $\leq$  3500 kg   GAW  $\leq$  3500 kg

GAW: maximum authorised loaded mass (gross authorised weight)

EW: empty weight

### NEED A GREY CARD (REGISTRATION DOCUMENT)?

A grey card is mandatory for any trailer with a GAW over 500 kg. Using a trailer requires specific insurance in most cases. Most insurance covers a trailer not exceeding 750 kg if it is hitched to the insured vehicle, but if you have a problem with an unhitched trailer, the insurance does not cover it!

### WHAT'S THE COUPLING HEIGHT?

The regulatory height of a loaded trailer is 43 cm  $\pm$  3.5 cm (from the ground to mid-ball).

### BRAKED TRAILER?



GAW  $\leq$  750 kg  
and EW  $\geq$  2 x GAW



GAW  $>$  750 kg  
or EW  $<$  2 x GAW

### SPEED LIMITS

Article R413-8 of the Highway Code

The speed of vehicles whose gross authorised weight is greater than 3.5 tonnes or combinations of vehicles whose total authorised rolling weight is greater than 3.5 tonnes, with the exception of public transport vehicles, is limited to:

- **90 km/h on motorways.**
- **80 km/h on priority roads and signposted as such.** However, this maximum speed is raised to 90 km/h for vehicles whose total weight is less than or equal to 12 tonnes on roads with two carriageways separated by a central reservation.
- **80 km/h on other roads.** However, this maximum speed is lowered to 60 km/h for articulated vehicles or vehicles with trailers whose total weight is greater than 12 tonnes.
- **50 km/h in built-up areas.**

**Always remember** that the braking distances of a vehicle plus trailer are much longer and watch out for yawing at high speeds. Example: a combination consisting of a car and a 1000 kg trailer travelling at 50 km/h needs 25 to 30% more braking distance, or about 20 m instead of 15 m for a car on its own.

### BEFORE SETTING OFF

**Check your tyre pressure.** Correct inflation ensures good roadholding and a longer tyre life. Also check wheel tightening.

**Check your coupling,** namely the ball and ball joint (*wear, lubrication*), as well as safety elements (*locking, cables etc*).

**Check load distribution.** To do this, make sure that the weight on the coupling ball is neither too low (*risk of yawing*), nor too great (*limited by the capacity of the coupling*). This weight should represent approximately 5 to 10% of the GAW.

**Check the signals.** A malfunction of the lights can result from a bad connection to the 7 or 13 pin socket, a damaged cable or burnt-out bulb.

**Check periodically,** approximately every 500 km, **the tightening** of the trailer's screws. Vibration can sometimes cause loosening.

**Routine maintenance** is described in the use and maintenance manual supplied with each trailer.



# LUGGAGE & TIPPER

## trailers

by *Lider*

Whether for occasional or intensive use, for individuals or professionals, our wide range of trailers will meet your needs.



**LUGGAGE TRAILERS**

**7**  
MODELS



**WOODEN TRAILERS**

**5**  
MODELS



**ROBUST TRAILERS**

**8**  
MODELS



**TIPPERS**

**8**  
MODELS



NEW FOR 2020



Robust 40393



Robust 40395



LUGGAGE TRAILERS

by LIDER

Our range of luggage trailers is perfect for transporting materials, intensive DIY activities or regular work, gardening and disposing of your green waste, travelling on weekends and summer holidays...  
Lider trailers are there for you every day.



7 models available  
from 1.50 m to 2.50 m



ALICANTE  
150x100x39



SARAGOS  
170x122x39



CADIX  
205x132x39

STRONG POINTS



FLORENCE  
233x132x39



VENISE  
205x122x39



PALERME  
233x132x39



TOLEDE  
253x147x30

OPTIONS

Equip your trailer

Cowl  
Roof rack



Carry bars  
(compatible with flat tarpaulin)



Flat tarpaulin



High tarpaulin



Mesh extensions



Double rails



Perforated sheet metal extensions



Ladder rack



Spare wheel underneath (39550)



Spare wheel on front rail (other models)



information at [www.lider.fr](http://www.lider.fr)

FEATURES	ALICANTE 39211	SARAGOS 39220	VENISE 39300	CADIX 39310	FLORENCE 39330	PALERME 39331	TOLEDE 39550
GAW (kg)	500/600/650/750	500/600/650/750	500/600/650/750	500/600/650/750	500/600/650/750	500/600/650/750	500/600/650/750
Min empty weight (kg)	136	156	168	168	228	176	305
Useful dimensions (cm)	150 x 100 x 39	170 x 122 x 39	205 x 122 x 39	205 x 132 x 39	233 x 132 x 39	233 x 132 x 39	253 x 147 x 30
Overall dimensions (cm)	263 x 152	283 x 174	318 x 174	318 x 184	346 x 184	346 x 184	365 x 159
Wheels	165/70R13	165/70R13	165/70R13	165/70R13	165/70R13	165/70R13	155/70R13
Axle resistance (kg)	750	750	750	750	2 x 750	750	2 x 750
Box type	tipping	tipping	tipping	tipping	fixed	tipping	fixed
Wooden	non-slip floor	non-slip floor	non-slip floor	non-slip floor	non-slip floor	non-slip floor	non-slip floor
Prop/Jockey wheel Ø48	jockey wheel	jockey wheel	jockey wheel	jockey wheel	jockey wheel	jockey wheel	jockey wheel
Folding rail(s)	front and rear	front and rear	front and rear	front and rear	front and rear	front and rear	4 sides
Galvanised V-shaped drawbar	□	□	□	□	□	□	□
Flat tarpaulin	option	option	option	option	option	option	option
High tarpaulin	height option 80cm	height option 80cm	height option 80cm	height option 80cm	height option 80cm	height option 80cm	
Spare wheel	option	option	option	option	option	option	option
Spare wheel support	option	option	option	option	option	option	option
Set of double side rails	height option 39cm	height option 39cm	height option 39cm	height option 39cm	height option 39cm	height option 39cm	height option 30 cm
Cowl/Cowl bars	options	options	options	options	options	options	
Mesh extensions	height option 50cm	height option 50cm	height option 50cm	height option 50cm	height option 50cm	height option 50cm	height option 60cm
Carry bars	option	option	option	option	option	option	
Ladder rack	height option 55cm	height option 55cm	height option 55cm	height option 55cm	height option 55cm	height option 55cm	height option 55cm
Perforated sheet metal extensions	height option 35cm	height option 35cm	height option 35cm	height option 35cm	height option 35cm	height option 35cm	

We reserve the right to make technical modifications to all our products in a constant search for quality improvement or following changes in the regulations.



# TRAILERS WOOD

by *Lider*

Lider, the leading manufacturer of wooden trailers, offers a complete range with accessories to support you in your daily work: gardening, various types of transport, DIY.



5 models available  
from 2 m to 2.50 m



**39440**  
201x133x40



**39450**  
with perforated sheet metal extension  
option  
251x133x40



**34470**  
with tailgate option  
251x133x40



**34480**  
251x133x40



**39440**  
201x133x40

## STRONG POINTS



## OPTIONS

Equip your trailer

Flat tarpaulin



High tarpaulin



Spare wheel and support



Ladder rack



Perforated sheet metal extensions



Mesh extensions



Tailgate

1m20 + rear props



information at [www.lider.fr](http://www.lider.fr)

FEATURES	TRAILER 39440	TRAILER 39460	TRAILER 39450	TRAILER 34470	TRAILER 34480
GAW (kg)	500/600/650/750	500/600/650/750	500/600/650/750	750	1300/1200/1100/1000
Min empty weight (kg)	195	214	250	255	320
Useful dimensions (cm)	201 x 133 x 40	251 x 133 x 40	251 x 133 x 40	251 x 133 x 40	251 x 133 x 40
Overall dimensions (cm)	322 x 182	372 x 182	372 x 184	375 x 182	386 x 184
Wheels	155/70R13	155/70R13	155/70R13	155R13	155/70R13
Axle resistance	750kg	750kg	2 x 750 Kg	750kg	2 x 750 Kg
Box type	tipping	tipping	fixed	tipping	fixed
jockey wheel	Ø 48	Ø 48	Ø 48	Ø 60	Ø 60
Folding rail(s)	front and rear	front and rear	front and rear	front and rear	front and rear
Inertia braking				yes	yes
Options	flat tarpaulin - high tarpaulin 80 cm - ladder rack spare wheel - spare wheel support perforated sheet metal extensions 35 cm mesh extensions 60 cm(39440) or 70 cm (39450 to 34480) tailgate maximum load 300 Kg 1.20 m with rear props				

We reserve the right to make technical modifications to all our products in a permanent search to improve quality or following changes in regulations.



# TRAILERS ROBUST

by *Lider*

The Robust range is intended for intensive use, in particular for landscapers, communities, farmers, etc. It's perfect for intermediate use between private individuals and professionals.



8 models available  
from 2 m to 3 m



**39530**  
250x125x110



**39350**  
200x134x50



**32390**  
200x134x50

**34392**  
with tailgate option  
253x134x50

**38398**  
300x150x50

**New**  
**40393**  
253x134x50

**New**  
**40395**  
253x134x50

## OPTIONS EQUIP YOUR TRAILER

Flat tarpaulin



High tarpaulin



Ladder rack



Mesh extensions



Perforated sheet metal extensions



Tailgate 1m20 + rear props



Spare wheel with support



Carry bars (compatible with flat tarpaulin)



information at [www.lider.fr](http://www.lider.fr)



**39394**  
253x134x50

## STRONG POINTS



FEATURES	GRANADA 39530	ROBUST 39350	ROBUST 32390	ROBUST 39394	New ROBUST 40393	ROBUST 34392	New ROBUST 40395	ROBUST 38398
GAW (kg)	500/600 650/750	500/600 650/750	750	500/600 650/750	500/600 650/750	1300/1200 1100/1000	1500/1300 1200/1100/1000	2500/2000/1900 1800/1700/1600/1500
Min empty weight (kg)	265	206	230	274	240	290	340	460
Useful dimensions (cm)	250 x 125 x 110	200 x 134 x 50	200 x 134 x 50	253 x 134 x 50	253 x 134 x 50	253 x 134 x 50	253 x 134 x 50	300 x 150 x 50
Overall dimensions (cm)	326 x 173	318 x 184	310 x 184	372 x 185	372 x 185	386 x 184	386 x 185	444 x 203
Wheels	155/70R13	155/70R13	155R13	155/70R13	155/70R13	165R13C	155/70R13	165R13C
Axle resistance	750kg	750kg	750kg	2 x 750 kg	750kg	1300 kg	2 x 750 kg	2 x 1300 kg
Box type	fixed	tipping	tipping	fixed	tipping	tipping	fixed	fixed
Prop / Jockey wheel	prop	Ø48	Ø48	Ø48	Ø48	Ø48	Ø60	Ø60
Adjustable galvanised	straight	V-shaped	V-shaped	V-shaped	V-shaped	V-shaped	V-shaped	V-shaped
Inertia braking	no	no	yes	no	no	yes	yes	yes
Ladder rack		option	option	option	option	option	option	option
Flat tarpaulin	option	option	option	option	option	option	option	option
Upper grill	option							
High tarpaulin		option (40 cm)	option (40 cm)	option (80 cm)	option (80 cm)	option (80 cm)	option (80 cm)	option (100 cm)
Spare wheel	option	option	option	option	option	option	option	option
Spare wheel support	option	option	option	option	option	option	option	option
Mesh extensions		option (ht 60 cm)	option (ht 60 cm)	option (ht 60 cm)	option (ht 60 cm)	option (ht 60 cm)	option (ht 60 cm)	option (ht 60 cm)
Perf sheet metal extensions ht 35 cm				option	option	option	option	
Carry bars		option	option	option	option	option	option	
Tailgate and rear props*					option Max load 300 kg			option Max load 1000 kg

\* Not compatible with perforated sheet metal extension

We reserve the right to make technical modifications to all our products in a permanent search to improve quality or following changes in regulations.



# TIPPERS

by *Lider*

We offer a complete range of tippers. Essential equipment for your work sites, our general public and professional tippers meet all your requirements.



8 models available  
from 2.50 m to 4 m



39560  
253x147x30



39600PE  
256x148x30



39580  
256x148x30

## STRONG POINTS



34352  
253x134x50



39610PE  
322x170x35



39612PE  
322x170x35



39614PE  
402x190x35

LED lights  
(also on 39610PE and 39612PE)




## OPTIONS

Equip your trailer

Spare wheel  
and support



Loading ramps  
(props necessary)



Double rail set  
(39560)




Mesh extensions



Ladder  
rack



Rear props



Ramps  
with support and props  
(34352)



information at [www.lider.fr](http://www.lider.fr)

FEATURES	39560	34352	39580	39600	39600PE	39610PE	39612PE	39614PE
Type	Tipper	Tipper	Tipper	Tipper	Tipper	Tipper	Tipper	Tipper
GAW (kg)	750/650/600/500	1500/1400/1300/1200/1100/1000	1500/1400/1300/1200/1100/1000	2500/2000/1900/1800/1700/1600	2500/2000/1900/1800/1700/1600	2500/2000/1900/1800/1700/1600	3500/3000/2700	3500/3000/2700
Min empty weight (kg)	335	450	500	550	590	780	850	970
Useful dimensions (cm)	253 x 147 x 30	253 x 134 x 50	256 x 148 x 30	256 x 148 x 30	256 x 148 x 30	322 x 170 x 35	322 x 170 x 35	402 x 190 x 35
Overall dimensions (cm)	365 x 159	390 x 184	385 x 160	385 x 160	385 x 160	476 x 184	479 x 184	559 x 204
Wheels	155/70R13	155/70R13	155/70R13	155R13C	155R13C	165R14C	185R14C	185R14C
Axle resistance (kg)	2 x 750	2 x 750 kg	2 x 750	2 x 1300	2 x 1300	2 x 1300	2 x 1800	2 x 1800
Floor height (cm)	65	51	69	71	71	72	72	72
jockey wheel	Ø 48	Ø 60	Ø 60	Ø 60	Ø 60	Ø 60	Ø 60	Ø 60
Pump	Manual	Manual	Manual	Manual	Electric	Electric + manual	Electric + manual	Electric + manual
Inertia braking		yes	yes	yes	yes	yes	yes	yes
Ramp housing						yes	yes	yes
LED lights						yes	yes	yes


We reserve the right to make technical modifications to all our products in a permanent search to improve quality or following changes in regulations.



# THE FLAT-BEDS & VEHICLE CARRIERS

by *Lider*

Our ranges of flat-beds and vehicle carriers are perfect for transporting all types of rolling vehicles: quad bikes, motorcycles, construction or maintenance equipment, cars, machinery...

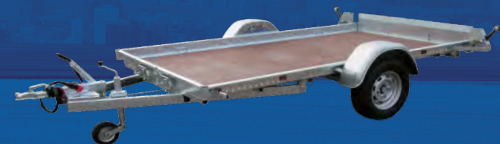

**ROBUST  
FLAT-BEDS**

**8  
MODELS**



**FLAT-BEDS  
WITH  
WHEELS UNDER-  
NEATH**

**11  
MODELS**



**MOTORCYCLE  
CARRIERS**

**3  
MODELS**



**CAR  
CARRIERS**

**5  
MODELS**



**LOW-BED  
CARRIERS**

**6  
MODELS**



**NEW FOR 2020**



40375



Optima adjustable drawbar  
(features on model 40685L)




# FLAT-BEDS ROBUST

by *Lider*

Both individuals and professionals alike will appreciate the many advantages offered by this range: reliability, ease and variety of use.  
The many options mean you can equip your flat-bed according to your needs.



8 models available  
from 2.50 m to 4.50 m

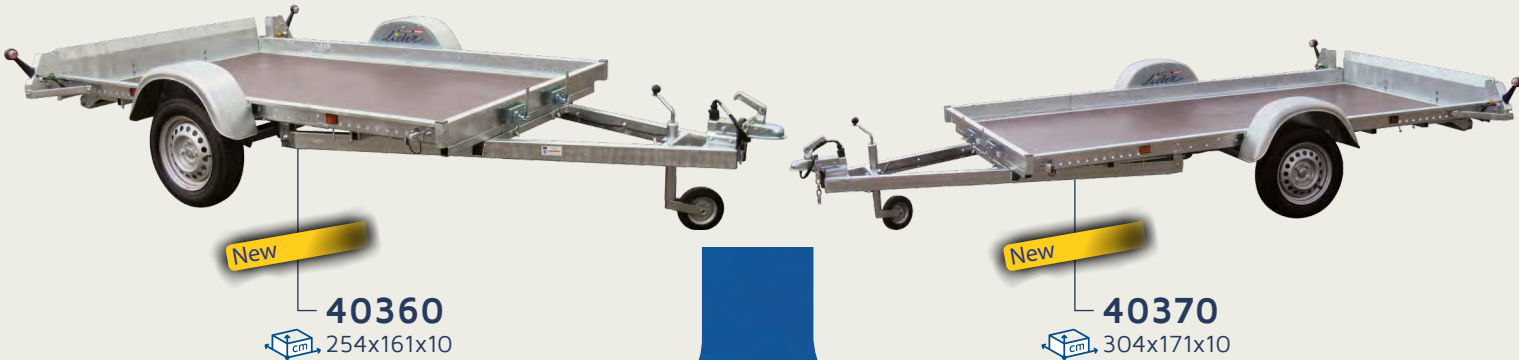

### Change of useful dimensions

- Width: + 10 cm for ref. 40370, 40375, 40380 and 40385
- Length: + 30 cm for ref. 40386



## STRONG POINTS



## OPTIONS

Mesh extension end caps  
(for mounting on a platform with  
rails + mesh extensions)



Set of 3 rails



Mesh extensions




Locking bar



Spare wheel  
with support



Winch with support



information at [www.lider.fr](http://www.lider.fr)



	New	New	New	New	New	New		
FEATURES	FLAT-BED 40360	FLAT-BED 40370	FLAT-BED 40375	FLAT-BED 40380	FLAT-BED 40385	FLAT-BED 40386	LOWERING FLAT-BED 36830	FLAT-BED EXTERNAL WHEELS 34780
GAW (kg)	500/600/650/750	500/600/650/750	750	1000	1350/1200 1100/1000	1600/1500 1400/1300	1500/1400/1300/ 1200/1100/1000	3500/3000/2700
Min empty weight (kg)	230	250	295	315	370	440	420	760
Useful dimensions (cm)	254 x 161 x 10	304 x 171 x 10	304 x 171 x 10	304 x 171 x 10	304 x 171 x 10	350 x 180 x 12	350 x 180 x 15	450 x 190 x 18
Overall dimensions (cm)	375 x 213	425 x 223	431 x 223	431 x 226	435 x 226	482 x 234	492 x 235	599 x 243
Wheels	155/70R13	155/70R13	155/70R13	185/70R13	165R14C	185R14C	195/50R13C	195R14C
Axle resistance (kg)	1 x 750	1 x 750	1 x 750	1 x 1000	1 x 1350	1 x 1600	1 x 1500	2 x 1800
Floor height / ground (cm)	45	45	46	46	48	48	40	55
Inertia braking			yes	yes	yes	yes	yes	yes
jockey wheel	Ø48	Ø48	Ø48	Ø60	Ø60	Ø60	Ø60	Ø60
Tipping handle	2	2	2	2	2	2		2
Options	Set of 3 rails, 40 cm high Mesh extensions, 70 cm high End piece for mesh extensions (for mounting on bed with rails) Locking bar (individual) Spare wheel - Spare wheel support Towing winch with support						Mesh extensions h. 70 cm Locking bar (individual) Spare wheel Spare wheel support	Extra locking bar Spare wheel Spare wheel support Towing winch + support
Series equipment								Wooden floor locking bar Hydraulic tipping+tailboard


We reserve the right to make technical modifications to all our products in a permanent search to improve quality or following changes in regulations.




# FLAT-BEDS WHEELS UNDERNEATH

by *Lider*

Our “wheels underneath” flat-bed trailers offer great transport options for various vehicles and green-space equipment. Check out the many accessory options that mean you can customise your platform.

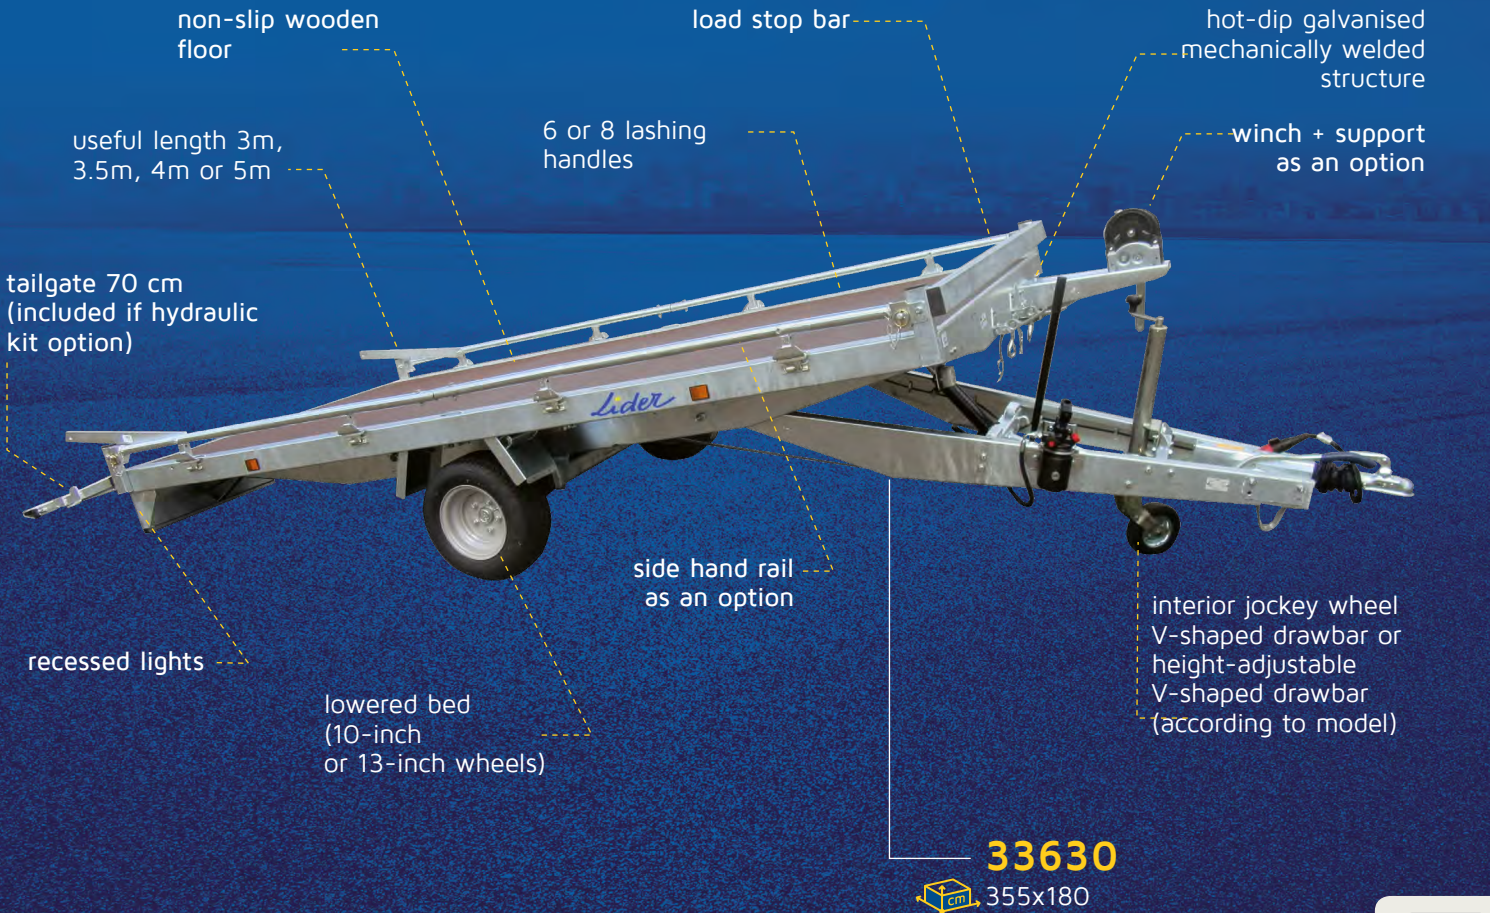

## STRONG POINTS

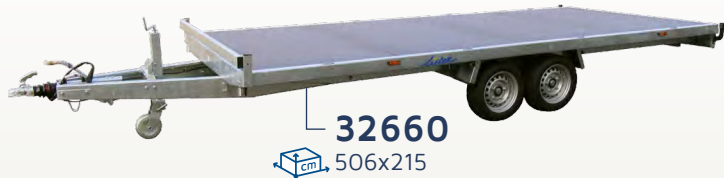

New items are available from early 2020

FEATURES	34620	34622	33630	34632	32650
GAW (kg)	2700/2500/2000/1900 1800/1700/1600/1500	1500/1400/1300/ 1200/1100/1000	1500/1400/1300 1200/1100/1000	2000/1900/1800/1700 1600/1500	2500/2000/1900/ 1800/1700/1600/1500
Min empty weight (kg)	400	370	370	430	600
Useful dimensions (cm)	306 x 170	306 x 170	355 x 180	355 x 180	406 x 215
Overall dimensions (cm)	438 x 176	438 x 176	490 x 186	490 x 186	556 x 221
Wheels	195/55–10C	155/70R13	195/55–10C	195/55–10C	195/55–10C
Axle resistance (kg)	2 x 1300	2 x 750	1 x 1500	2 x 1000	2 x 1300
Floor height / ground (cm)	61	68	63	63	61
Adjustable galvanised	V-shaped	V-shaped	V-shaped	V-shaped	V-shaped
Coupling height / ground (cm)					
jockey wheel	Ø60	Ø60	Ø60	Ø60	Ø60
Series equipment	load stop - 6 lashing handles				load stop - 8 lashing handles

New items are available from early 2020

FEATURES	40655L	32670	32680	40685L	32660	40665L
GAW (kg)	2500/2000/1900/1800 1700/1600/1500	2500/2000/1900/1800 1700/1600/1500	3500/3000/2700	3500/3000/2700	3500/3000/2700	3500/3000/2700
Min empty weight (kg)	660	670	700	800	770	870
Useful dimensions (cm)	406 x 215	506 x 215	406 x 215	406 x 215	506 x 215	506 x 215
Overall dimensions (cm)	580 x 221	656 x 221	558 x 221	587 x 221	658 x 221	687 x 221
Wheels	195/55–10C	195/55–10C	195/50R13C	195/50R13C	195/50R13C	195/50R13C
Axle resistance (kg)	2 x 1300	2 x 1300	2 x 1800	2 x 1800	2 x 1800	2 x 1800
Floor height / ground (cm)	61	61	65	65	65	65
Adjustable galvanised	optima drawbar	V-shaped	V-shaped	optima drawbar	V-shaped	optima drawbar
Coupling height / ground (cm)	29 to 66			33 to 73		33 to 73
jockey wheel	Ø 60	Ø 60	square 70	Ø 73	square 70	Ø 73
Series equipment	load stop - 8 lashing handles					

**Options common to all models:** aluminium rails ht 35 cm / spare wheel / spare wheel support / winch + support / folding handrail / chock + rails.  
**Options for models 34620 - 34622:** mesh extensions (+ compulsory side rails) = ht 70 cm / aluminium ramps / ramp housing kit + rear props (factory-fitted).  
**Options for models 33630 - 34632:** hydraulic tipping kit + tailgate (factory fitted) / mesh extensions (+ mandatory side panels) = ht 60 cm.  
**Options for models 32650 - 40655L - 32670 - 32680 - 40685L - 32660 - 40665L:** hydraulic tipping kit + tailgate (factory fitted) / mesh extensions (+ mandatory side rails) = ht 60 cm / aluminium ramps + rear props (standard ramp housing) / ring for adjustable drawbar.

We reserve the right to make technical modifications to all our products in a permanent search to improve quality or following changes in regulations.



## OPTIONS Equip your trailer

Chock + rails




Spare wheel with support



Mesh extensions  
(combined with rails)



Towing winch  
with support



Aluminium ramps  
and rear props





# MOTORCYCLE CARRIER

by *Lider*

Whether for fun or competition, quad and motorcycle enthusiasts will appreciate this highly adaptable range. Option of 1 to 3 rails depending on the model and accessories: loading ramp, jockey wheel, spare wheel...



3 models available  
up to 1.80 m



**34400E**  
with 1 rail option  
173x115




**39420**  
with 3-rail option  
178x167



Storage  
of the loading ramp



**39401**  
with floor options  
+ quad kit  
178x126

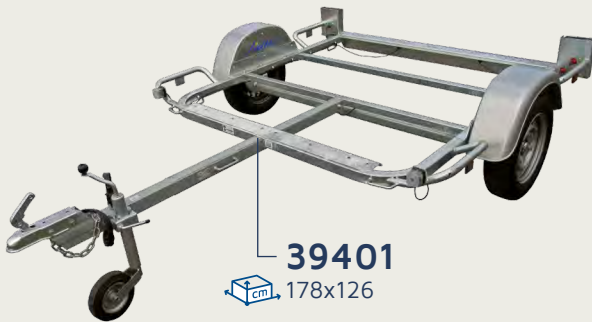


**39401**  
178x126


## OPTIONS

Equip your trailer

Rail with hoop



Loading ramp



jockey wheel



non-slip wooden floor



Spare wheel  
with support



Quad kit  
(includes: guardrails  
+ 2 ramps, floor not included)



information at [www.lider.fr](http://www.lider.fr)

transporting 2  
large motorcycles  
possible from 39401

modular  
trailer

protection  
and lashing bars

galvanised chassis,  
drawbar, axle, rails,  
ramp

galvanised welded  
chassis across  
the whole range

recessed lights

large loading  
ramp

spare wheel  
under the chassis

easy, open access  
across the whole width

wooden  
floor 12 mm  
(as an option)

lowered chassis

galvanised fully-covering  
mudguard

lashing  
for straps  
under the chassis

**39401**

178x126

## STRONG POINTS



FEATURES	MOTORCYCLE CARRIER 34400E	MOTORCYCLE CARRIER 39401	MOTORCYCLE CARRIER 39420
GAW (kg)	500	500/600/650/750	500/600/650/750
Min empty weight (kg)	85	130	140
Useful dimensions (cm)	173 x 115	178 x 126	178 x 167
Overall dimensions (cm)	297 x 156	312 x 168	312 x 209
Wheels	5.00 x 10	155/70R13	155/70R13
Axle resistance (kg)	500	750	750
Useful height / ground (cm)	47	41	41
Tilting chassis	no	no	no
Lowered chassis		yes	yes
Adjustable galvanised	straight	straight	straight
Number of rails (12 kg per rail)	1 or 2 as an option	1 or 2 as an option	1 to 3 as an option
Loading ramp (9 kg)	option	option	option
jockey wheel	option	Ø48	Ø48
Spare wheel with support	option	option	option
Non-slip wooden floor		option	option
Quad kit (useful dim. 199x124 cm)		option	



# CAR CARRIER

by *Lider*

Our range of car carriers equipped with ramps is designed to transport light and utility vehicles.



5 models available  
from 1300 to 2700 kg



39750  
361x185x11



39760  
394x190x14

hydraulic tipping kit option

large series ramps



2 tipping handles

lashing handles

non-slip surface width 435 mm

lowered centre of gravity for better roadholding

bevelled 5 cm profile over 27 cm (39750/39770)


mini-ramps fixed to 39750/39770

marker lights on flexible support and recessed rear lights

galvanised fully-covering mudguard

articulated V-shaped drawbar for tipping

## STRONG POINTS

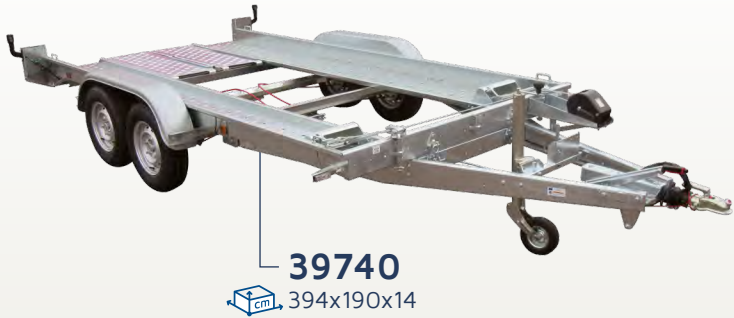

39740  
394x190x14



large ramps storage  
39740 and 39760



39790  
450x203x6


## OPTIONS

Equip your trailer

Hydraulic tipping kit



Removable wooden floor



Spare wheel and support



Additional wheel chock



\*Large ramps kit for loading vehicles with an attack angle of less than 23°



All chassis are designed to accommodate wheel straps (not provided)



\*option only for ref. 39750 and 39770

information at [www.lider.fr](http://www.lider.fr)

FEATURES	CAR CARRIER 39750	CAR CARRIER 39770	CAR CARRIER 39740	CAR CARRIER 39760	CAR CARRIER WHEELS UNDER-NEATH 39790
GAW (kg)	1300/1200/1100/1000	1600/1500/1400/1300	2000/1900/1800/1700 1600/1500	2500	2700
Min empty weight (kg)	370	430	575	580	640
Useful dimensions (cm)	361 x 185 x 11	361 x 185 x 11	394 x 190 x 14	394 x 190 x 14	450 x 203 x 6
Overall dimensions (cm)	540 x 237	540 x 237	547 x 237	547 x 237	600 x 209
Wheels	165R13C	195/50R13C	165R13C	165R13C	165R13C
Axle resistance (kg)	1 x 1300	1 x 1600	2 x 1000	2 x 1300	2 x 1350
Adjustable galvanised	V-shaped	V-shaped	V-shaped	V-shaped	V-shaped
Useful height / ground (cm)	47	44	46	46	71
jockey wheel	Ø60	Ø60	Ø60	Ø60	Ø60
Series equipment	2 fixed ramps 43 x 30 cm Tipping springs 2 wheel chocks Winch + support		2 large removable ramps 43 x 120 cm Tipping springs 2 wheel chocks Winch + support		2 ramps 2 FR props 2 wheel chocks Winch with support
Options	Spare wheel Spare wheel support Additional wheel chock Hydraulic kit Large ramps kit		Spare wheel Spare wheel support Hydraulic kit Additional wheel chocks Wooden floor		Spare wheel Spare wheel support Plywood floor (for the flat part) Additional wheel chock

We reserve the right to make technical modifications to all our products in a permanent search to improve quality or following changes in regulations.



# LOW-BED TRAILER

by *Lider*

Our range of low-bed trailers offers building, public works, agricultural professionals and landscapers the possibility of transporting their mini-excavator type of construction equipment.



6 models available  
from 3 m to 3.50 m




New  
40860  
300x145x8/18




New  
40905L  
350x170x8/18



40865L  
300x145x8/18  
New  
optima adjustable  
drawbar

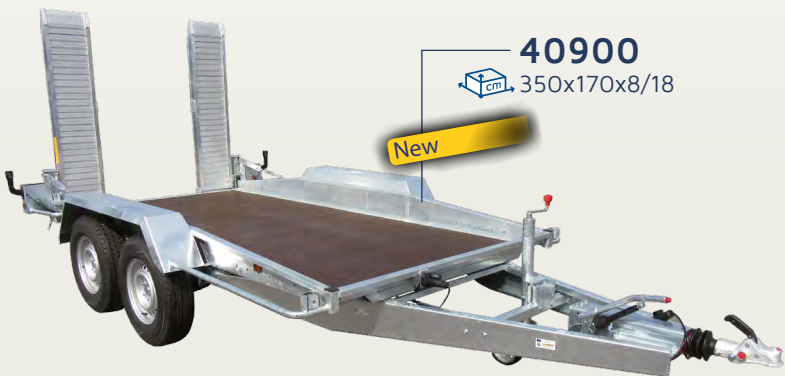

40900  
350x170x8/18  
New

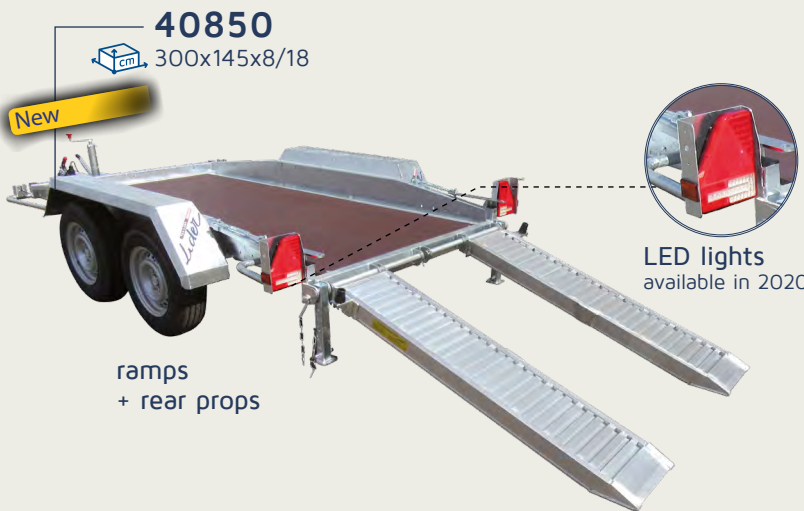


40850  
300x145x8/18  
New  
ramps  
+ rear props  
LED lights  
available in 2020

## OPTIONS Equip your trailer

Spare wheel  
+ support



Chain kit



Lashing ring



Step-  
down  
unit



Stop bar



information at [www.lider.fr](http://www.lider.fr)



4 inside lashing  
points

non-slip wooden  
floor  
thickness 18 mm

hot-dip galvanised  
welded chassis, light  
supports and  
mudguards

alu ramps  
width 35 cm

recessed lights

adjustable spacing  
of ramps

40850  
300x145x8/18

wheels  
14 inches

## STRONG POINTS



New range available in  
2020  
(please ask us)

FEATURES	New LOW-BED TRAI- LER 40850	New LOW-BED TRAI- LER 40855L	New LOW-BED TRAI- LER 40860	New LOW-BED TRAI- LER 40865L	New LOW-BED TRAI- LER 40900	New LOW-BED TRAI- LER 40905L
	2500/2000/1900 1800/1700/1600/1500	2500/2000/1900 1800/1700/1600/1500	3500/3000/2700	3500/3000/2700	3500/3000/2700	3500/3000/2700
GAW (kg)	2500/2000/1900 1800/1700/1600/1500	2500/2000/1900 1800/1700/1600/1500	3500/3000/2700	3500/3000/2700	3500/3000/2700	3500/3000/2700
Min empty weight (kg)	530	570	610	690	670	720
Useful dimensions (cm)	300 x 145 x 8/18	300 x 145 x 8/18	300 x 145 x 8/18	300 x 145 x 8/18	350 x 170 x 8/18	350 x 170 x 8/18
Overall dimensions (cm)	463 x 205	522 x 205	465 x 205	528 x 205	525 x 230	574 x 230
Wheels	175R14C	175R14C	195R14C	195R14C	195R14C	195R14C
Axle resistance (kg)	2 x 1300	2 x 1300	2 x 1800	2 x 1800	2 x 1800	2 x 1800
Adjustable galvanised	V-shaped	optima drawbar	V-shaped	optima drawbar	V-shaped	optima drawbar
Coupling height / ground (cm)		25 to 89		33 to 96		33 to 96
Floor height / ground (cm)	49	49	52	52	52	52
jockey wheel	Ø60	Ø60	Ø60	Ø73	Ø60	Ø73
Series equipment	Wooden floor – LED lights Alu ramps 1m60 – Rear props					
Options	Stop bar – Spare wheel – Spare wheel support Lashing chains – Adjustable drawbar ring – Voltage step-down 24V-12V					

We reserve the right to make technical modifications to all our products in a permanent search to improve quality or following changes in regulations.



# THE V A N S

by *Lider*

Ideal for transporting materials in complete safety, our vans provide the perfect solution for your gear: quads, motorcycles, equipment for fairs, shows and markets. Loading can be made easier thanks to our tailgate and side door options.



5  
MODELS





# VAN S

by *Lider*

The whole range of vans offers the advantage of protecting goods transported thanks to its waterproofness and secure closure.

More than just a means of transport, it also means you can store material to make it a true partner for professionals.

It's also ideal for motorhome users.



interior  
lighting  
via ceiling light

aluminium profiles

smooth plywood  
internal walls

2-point closure  
with key and lock

jockey wheel

door stop

non-slip internal floor  
15 mm

hot-dip galvanised  
welded chassis

6 recessed internal rings

props

**38960**  
260x142x162

## STRONG POINTS



## OPTIONS

Equip your trailer

Spare wheel  
+ support



Rail/Lashing ring(s)



1 rail

2 rails

3 rails



Tailgate



Side door  
width 60 cm with step



information at [www.lider.fr](http://www.lider.fr)

FEATURES	VAN 39920	VAN 38930	VAN 38970	VAN 38960	VAN 38950
GAW (kg)	750/650/600/500	750	750	1300/1200/1100/1000	2000/1900/1800 1700/1600/1500
Min empty weight (kg)	358	391	465	490	630
Interior dimensions LxWxH (cm)	220 x 135 x 143	220 x 135 x 143	260 x 142 x 162	260 x 142 x 162	300 x 150 x 178
Doorway(s) WxH (cm)	125 x 137	125 x 137	132 x 156	132 x 156	140 x 172
with tailgate WxH (cm)	113 x 134	113 x 134	120 x 153	120 x 153	128 x 169
Overall dimensions LxWxH (cm)	339 x 184 x 199	356 x 184 x 199	416 x 191 x 220	417 x 191 x 220	457 x 199 x 235
Wheels	155/70R13	155R13	155R13	165R13C	155R13C
Axle resistance (kg)	1 x 750	1 x 750	1 x 750	1 x 1300	2 x 1100
Floor height / ground (cm)	51	51	52	52	52
jockey wheel	Ø48	Ø48	Ø48	Ø60	Ø60
Inertia braking		yes	yes	yes	yes
Options	Spare wheel – Spare wheel support Lashing rails – Lashing rail ring(s) Tailgate max load* – Side door width 60 cm with step				

\* For ref. 39920 and 38930 = 400 kg max \* For ref. 38970 and 38960 = 700 kg max \* For ref. 38950 = 1000 kg max

We reserve the right to make technical modifications to all our products in a permanent search to improve quality or following changes in regulations.




# THE ACCESSORIES

by *Lider*



## ALU & STEEL RAMPS

6 MODELS



## NETS

2 MODELS




## WHEEL LOCK

1 MODEL

Universal anti-theft device for unhitched trailer

15330



## STEEL RAMPS

FEATURES	01896
Length	1.50m
Profile height	30mm
Clearable height	80cm
Concentrated load per pair	200kg
Width	20cm
Weight per pair	15kg



01896

## WHEEL LOCK

FEATURES	37015
Dimensions (cm)	60 x 35 x 22
Buckle strap (cm)	length 60 x width 2.5
Corresponding wheels	10 to 19 inches


Please note: not compatible with the motorcycle carrier range



37015



05970

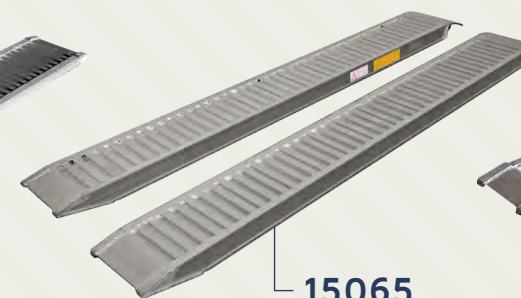

15065




05971

## ALUMINIUM RAMPS

FEATURES		05970	15065	05971		05969	15308
Length		2.50m	2.50m	2.95m		2.50m	2m
Profile height		50mm	85mm	110 mm		72mm	50mm
Clearable height		80cm	80cm	90cm		80cm	60cm
Reach per pair (depending on the wheelbase of the vehicle)	1m	1250kg	2345kg	3310kg	0.75 m	1360kg	-
	1.25m	1550kg	3300kg	3700kg	1m	1590kg	400kg
	1.50m	2000kg	3300kg	3700kg	1.25m	1600kg	-
Concentrated load per pair		750kg	1285kg	2050kg		1010kg	-
Inside width		25cm	22cm	22cm		25cm	-
Outside width		32cm	30cm	30cm		31cm	20cm
Weight per pair		30kg	36kg	50kg		28kg	11kg
Profile		Flat	Flat	Flat		Flat	Curved



05969

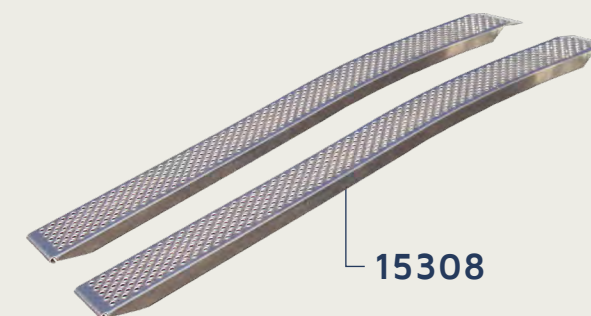

15308



15331



15332

## NETS

NEW FOR

FEATURES	15331	15332
Length	2.20m	2.50m
Width	1.50m	1.60m
Mesh (cm)	5.5 x 5.5	5.5 x 5.5
Correspondence with trailers of useful length	≤ 2.05 m	≤ 2.50m

## THE ESSENTIALS

### ANTI-THEFT DEVICES



15330



05419SP



05695



05696

### COUPLING



05169



05173

### JOCKEY WHEELS



15333



05064



05148



S05236

+ details on accessories and spare parts available in your spare parts after-sales catalogue



# Lider

DESIGN & MANUFACTURE  
OF ROAD TRAILERS

Your dealer



15313



[www.lider.fr](http://www.lider.fr)